



CCS 160 Express Mobile Bleachers



CCS 160 Express Mobile Bleacher is a self-contained seating system capable of highway transport and fast set-up. Bleacher unfolds to offer 10 row bleacher seating with guardrails. Bleachers are equipped with a self-contained hydraulic actuator, permitting fast, one-person set-up.

Bleachers have a rugged, galvanized steel support structure with aluminum seat and footboards. Weather resistant materials and components shall be used throughout. Leveling jacks shall be provided for bleacher leveling and support.

Bleachers have a constant, standard seat slope for safety and shall fold to 96" wide for highway towing. Guardrails fold and unfold with the main bleacher structure, and do not require additional assembly or latching. Bleacher does not require latches or support pads to be positioned for transport.


Bleacher system shall be engineered to meet or exceed IBC code requirements when equipped with optional IBC features.

ALWAYS & AVAILABLE SEATING

2372 DAY ROAD GREENLEAF, WI 54126
PHONE: (920) 864-7446

MOBILE BLEACHERS

	Length	Width (Depth)	Height
Bleacher Dimensions	27ft	18ft	7ft 6in (Top Seat)
Towing Dimensions	34ft 8in (with hitch)	8ft	12ft 6in

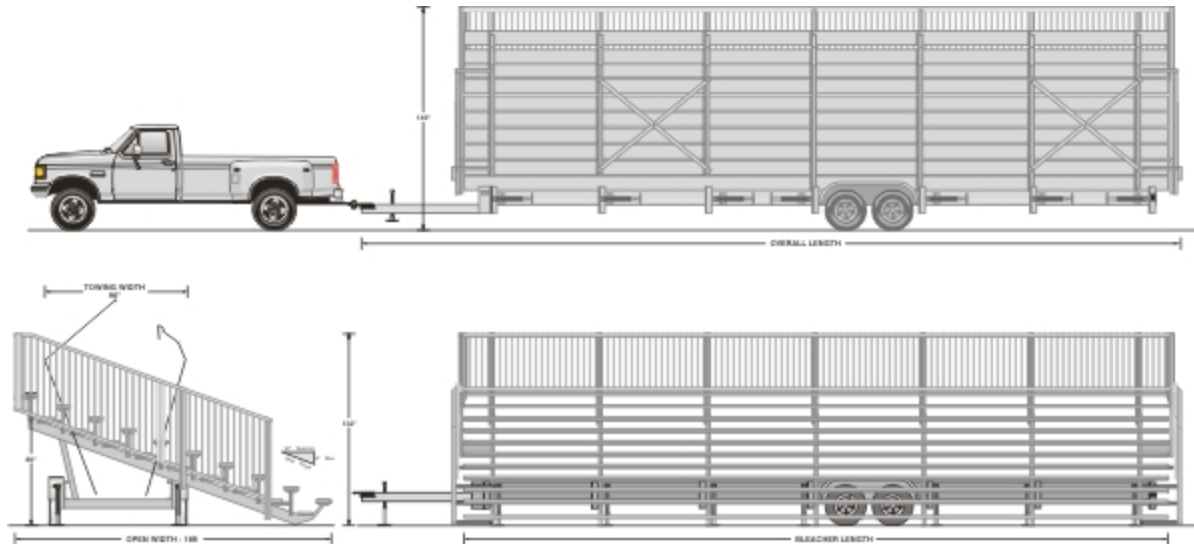

Seat Rows	10
Row Length	27 ft
Seating Capacity	160 seats - at 18" per seat
Frame	12" structural rolled steel channel, weight 25 lbs. per linear foot
Finish	All components are zinc hot-dipped galvanized (A-123) standard which is the same type of hot-dipped galvanizing that the state DOT requires on all highway signs.
Seat & Foot Boards	2"x10" nominal anodized extruded aluminum; Footboards: 2" x 12" nominal anodized extruded aluminum.
Guardrails	Welded steel with vertical balusters, galvanized finish
Hitch	Pintel ring coupler or 2 5/16" ball coupler, customer choice, equipped with safety chains and break-away switch (Hitch slides into bleacher, no need for removal)
Suspension	14,000 lbs. tandem axle
Brakes	Four (4) wheel electric breaks
Tires	ST205/75R14, 8 ply., load range D
Towing Electrical	ICC road and signal lights, license bracket and light, one cable and connector.
Tongue Jack	10,000 lbs. crank jack

Leveling Jacks	Ten (10) frame mounted 7,000 lbs. swivel jacks, pivot for maximum ground clearance attached to frame with aircraft cable deter theft.
Power	12VDC deep cycle battery & charger
Actuator	Self-contained hydraulic system, fluid reservoir, battery charger and remote control housed in a lockable galvanized steel compartment.
Hardware	Galvanized steel and stainless steel nuts and bolts.
Spare Tire Bracket	Included with lockable plate
Rear Skid Plates	Included at the rear of the unit, enclosed.
Towing Dimensions	Width – 8’ Length – 34’8” Height – 12’6”
Open Seat Dimensions	Width – 18’ Length – 27’ Height – 7’6”* *Height is to the top row of seating above ground level. Add 42” to the top of the guardrail.
Operation Manual	Two (2) operation manuals are included.
On-Site Training	Will be provided at the time of delivery.