



### **CCS 160 Express Mobile Bleachers**



CCS 160 Express Mobile Bleacher is a self-contained seating system capable of highway transport and fast set-up. Bleacher unfolds to offer 10 row bleacher seating with guardrails. Bleachers are equipped with a self-contained hydraulic actuator, permitting fast, one-person set-up.

Bleachers have a rugged, galvanized steel support structure with aluminum seat and footboards. Weather resistant materials and components shall be used throughout. Leveling jacks shall be provided for bleacher leveling and support.

Bleachers have a constant, standard seat slope for safety and shall fold to 96" wide for highway towing. Guardrails fold and unfold with the main bleacher structure, and do not require additional assembly or latching. Bleacher does not require latches or support pads to be positioned for transport.


Bleacher system shall be engineered to meet or exceed IBC code requirements when equipped with optional IBC features.

# ALWAYS & AVAILABLE SEATING

2372 DAY ROAD GREENLEAF, WI 54126  
PHONE: (920) 864-7446

## MOBILE BLEACHERS

	<b>Length</b>	<b>Width (Depth)</b>	<b>Height</b>
<b>Bleacher Dimensions</b>	<b>27ft</b>	<b>18ft</b>	<b>7ft 6in (Top Seat)</b>
<b>Towing Dimensions</b>	<b>34ft 8in (with hitch)</b>	<b>8ft</b>	<b>12ft 6in</b>

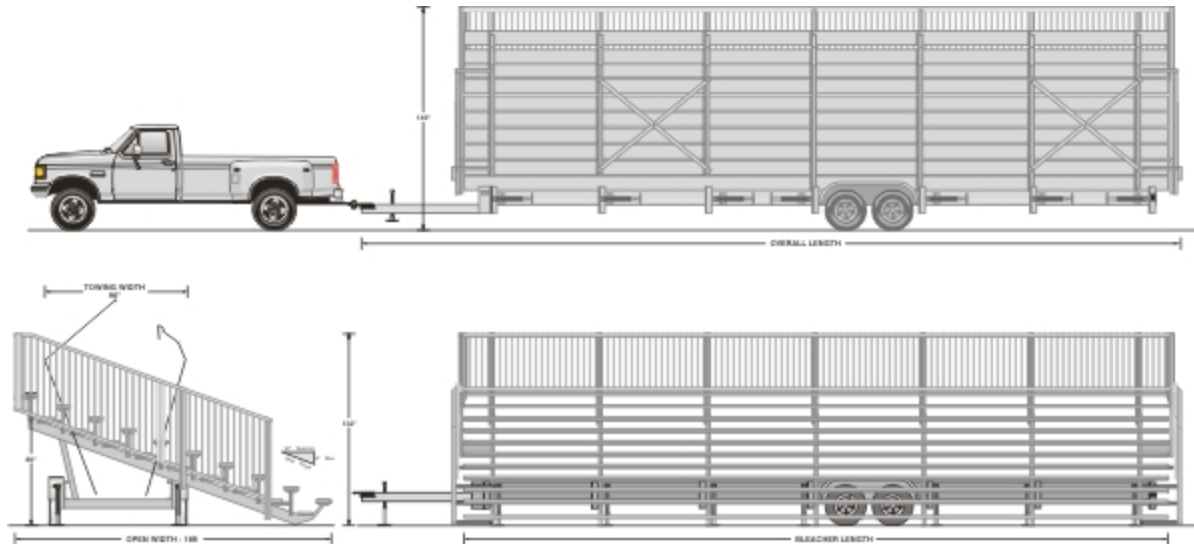

<b>Seat Rows</b>	10
<b>Row Length</b>	27 ft
<b>Seating Capacity</b>	160 seats - at 18" per seat
<b>Frame</b>	12" structural rolled steel channel, weight 25 lbs. per linear foot
<b>Finish</b>	All components are zinc hot-dipped galvanized (A-123) standard which is the same type of hot-dipped galvanizing that the state DOT requires on all highway signs.
<b>Seat &amp; Foot Boards</b>	2"x10" nominal anodized extruded aluminum; Footboards: 2" x 12" nominal anodized extruded aluminum.
<b>Guardrails</b>	Welded steel with vertical balusters, galvanized finish
<b>Hitch</b>	Pintel ring coupler or 2 5/16" ball coupler, customer choice, equipped with safety chains and break-away switch (Hitch slides into bleacher, no need for removal)
<b>Suspension</b>	14,000 lbs. tandem axle
<b>Brakes</b>	Four (4) wheel electric breaks
<b>Tires</b>	ST205/75R14, 8 ply., load range D
<b>Towing Electrical</b>	ICC road and signal lights, license bracket and light, one cable and connector.
<b>Tongue Jack</b>	10,000 lbs. crank jack

<b>Leveling Jacks</b>	Ten (10) frame mounted 7,000 lbs. swivel jacks, pivot for maximum ground clearance attached to frame with aircraft cable deter theft.
<b>Power</b>	12VDC deep cycle battery & charger
<b>Actuator</b>	Self-contained hydraulic system, fluid reservoir, battery charger and remote control housed in a lockable galvanized steel compartment.
<b>Hardware</b>	Galvanized steel and stainless steel nuts and bolts.
<b>Spare Tire Bracket</b>	Included with lockable plate
<b>Rear Skid Plates</b>	Included at the rear of the unit, enclosed.
<b>Towing Dimensions</b>	Width – 8’ Length – 34’8” Height – 12’6”
<b>Open Seat Dimensions</b>	Width – 18’ Length – 27’ Height – 7’6”* *Height is to the top row of seating above ground level. Add 42” to the top of the guardrail.
<b>Operation Manual</b>	Two (2) operation manuals are included.
<b>On-Site Training</b>	Will be provided at the time of delivery.